


MSS970-10

Basic Standard-Definition Flash Network Player



Features:


- Up to 1 SD video and 1 flash playback recommended
- Aluminum Profile With Fin, Ultra compact size with Fanless Design
- Industrial grade CF card for system & HDD for data storage
- Flash support for fancy animation effect
- RSS feed to display most updated news
- Zone Sync allows your content be synchronized between different zones

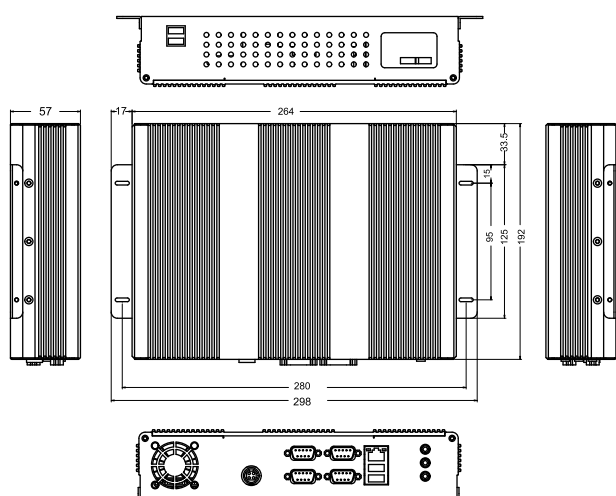

Measurements shown in mm
All Dimensions are ± 0.5 mm



- I. Power Reset Button
- II. Power / HDD LED
- III. Power On Button
- IV. USB

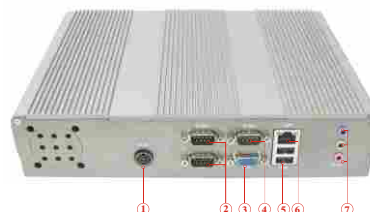

1. Power Jack
2. RS-232 Conn.
3. VGA Conn.
4. RS232/422/485 Conn.
5. USB
6. RJ-45
7. AudioJack

Mechanical Specification

- Construction** : Aluminum housing
Mouting : Desktop/wall-mounting
Dimension : 264 x 57x 192 mm (W x H x D)

Power Supply

- Power Input** : +12V DC-IN(Lockable,Power Jack)
Power Consumption : Typical +12V@5APower Input

Environmental Specification

- Operation Temperature** : -20~ 60°C
Operating Humidity : 30% ~ 90% (Non-condensing, RH)

File Support

- Video** : MPEG 1/2/4, AVI,WMV,Divx,Xvid,Mov
Audio : MP3,WAV,WMA
Images : JPG,BMP,PNG,GIF
Flash : SWF , FLV
MS PowerPoint : PPT(slide show)
HTML : HTML

Order Information

MSS970-11 Flash HDPlayer (40GB HDD) with MSOPro Management Software

I/O Connectors

- Rear Panel External I/Os** : 1 x RJ-45(Gigabit Ethernet)
 3 x RS-232 Connector (male)
 1 x VGA 15p DSUB(female)
 2 x USB 2.0
 1 x Mic In/Line In/Line Out
 1 x DC-IN Power Jack
- Front Panel External I/Os** : 1 x Power/HDD LED
 1 x Reset Button
 1 x Power on Button
 2 x USB 2.0

MSS970 series Performance Comparison

Model	MSS970-10	MSS970-11	MSS970-12	MSS970-A1
Recommended Max. Output Resolution	1024 x 768	1366x768	1920x1080	1920x1080
Video	1SD	2 SD	1 HDR	2HDR or 1FHD
Flash	1	3	2	6
Picture	1	2	4	4
RSS/HTML	1	2	4	4

- SD=480p,max 4 Mbps
- HDR=720p,max 4Mbps
- FHD=1080p,max 10Mbps
- Flash resolution: 600x160,Frame Rate:20fr/sec