Full IP65 Chassis LCD

15"

RoHS COMPLIANT 2002/95/EC

Specifications

Model Name	R15L600-65C3
Viewable Size Image	15"
Active Display Area(mm)	304.128 (H) x 228.096 (V)
Pixel Pitch(mm)	0.297(H)x0.297(V)
Number of Pixels	1024x768
Contrast Ratio	700:1(typ.)
Display Color	16.2M(6bit+FRC)
Brightness(cd/m^2)	250(typ.)
Viewing Angle(CR>=10)	-70~70(H);-65~60(V)(typ.)
Synchronization Range Horizontal/Vertical	31.5~60.0KHz/60~75Hz
Recommended Resolution	1024x768@60Hz, 75Hz
Signal Connector	15 pin D-Sub
I/O	3-in-1 power/RS232/usb cable (IP65 connector in monitor side) VGA cable (IP65 connector in monitor side)
Power Source	DC12V
Power Consumption	25W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	No
Optional DVI Input	No
Optional Touch Screen	Resistive,Capacitive,SAW(Only IP54)

*Due to Panel material's deviation, different panel supplier will set different specific variance range to optical characteristics. The factors of time used, Lamp current, Ambient temperature will influence the optical measurements.

Mechanical Drawing

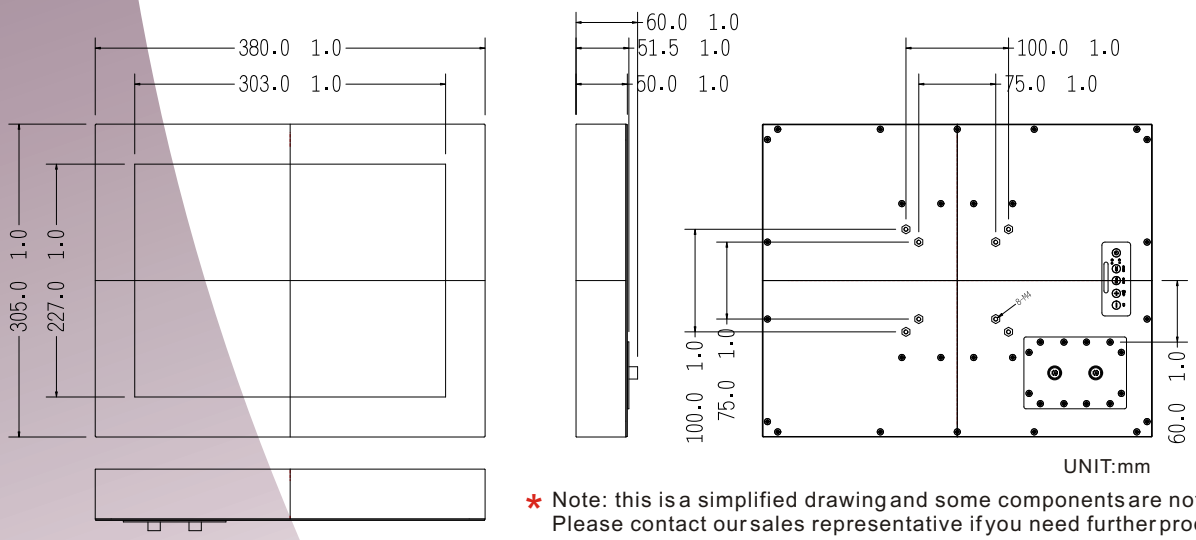

UNIT:mm

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.