20.1" Standalone

Play Directly from USB drive

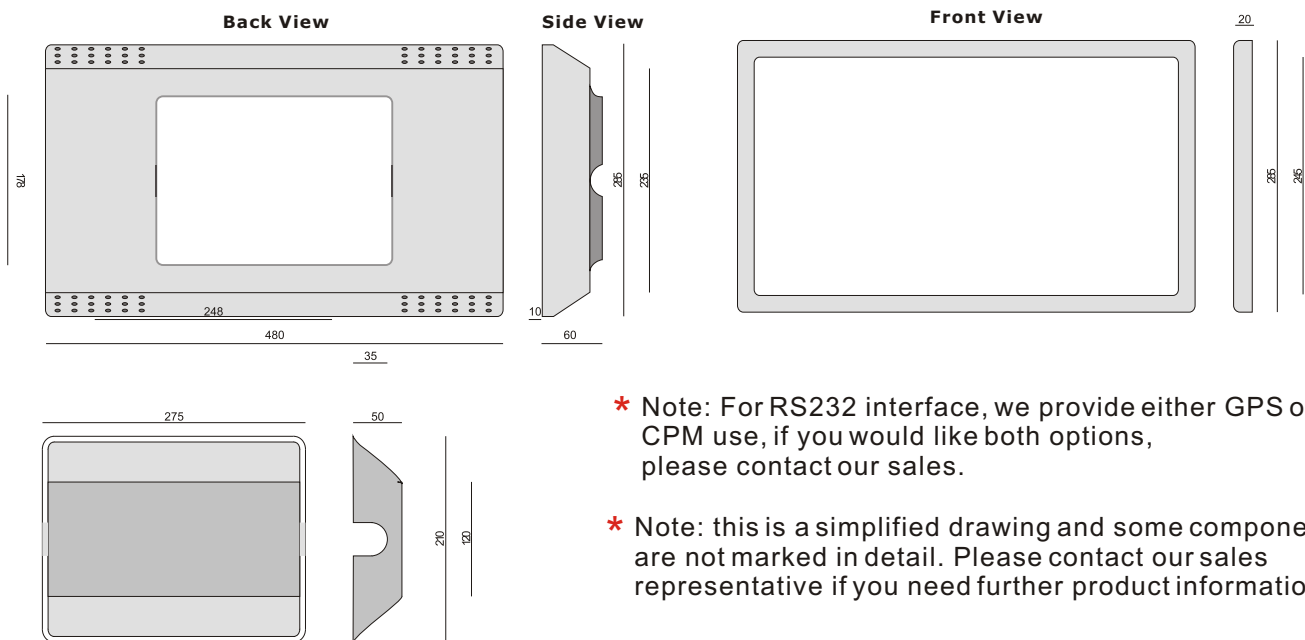## W20LS01-FCA3BM

◆ Standard Feature:

- ◆ ABS Chassis
- ◆ Built-in MPC500
- ◆ Standalone Player
- ◆ Protection Glass
- ◆ Wide Voltage Input

◆ OptionalFeature:

- ◆ GPS receiver(GPS log)
- ◆ Sunlight Readable

Multi-HD 1080

Back View

248
480
35
178

Side View

285
235
10
60

Front View

20
285
245

275
50
210
120

* Note: For RS232 interface, we provide either GPS or CPM use, if you would like both options, please contact our sales.

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

LCD Optical Spec:

• Active Display Area	:	443.6mm(H)X249.41mm(V)
• Pixel Pitch	:	0.325mmx0.325mm
• Number of Pixels	:	1366x768
• Contrast Ratio	:	700:1
• Display Color	:	16.2M(6bits+FRC)
• Brightness(cd/m2)	:	450
• View Angle(CR>=10)	:	-80~80(H);-60~80(V)

General/Content:

- • **General**
  Play back : play directly from USB flash drive
- • **Content**
  Video Format Support : MPEG1,MPEG2,MPEG4,WMV9
  Audio Format Support : MP3,WMA,PNG

Input/Output:

- • Output
  Audio Output : 2 x 2W speakers
  Video Output : 1 x DVI output to another monitor

Environment Considerations:

- • Operating Temperature : 0 to 50℃
- • Humidity : 5-85%@50℃

Power Specifications:

- •Power Consumption : Approx:60W
- •Power Input : Terminal Block for 8~32V DC Input

Mechanical:

- •Standard Housing : ABS Housing
- •Optional Housing : Open frame
  : ABS Housing without pole mount

Rev.	Reasons	Revised Date
1.0	First Release	Apr-17-09